

الکترونیک
صنعت امن

SANAT AMN ELECTRONIC

alhua
TECHNOLOGY

H D C V I

PRODUCT PRICE LIST

با خرید محصولات صنعت امن
از باشگاه مشتریان صنعت امن
هدیه دریافت نمایید



HDCVI CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-HAC-B1A21P	2MP HDCVI Fixed-focal Bullet Camera > Max. 30 fps@1080p. > Smart IR Illumination. > 20 m illumination distance. > 3.6 mm fixed lens (2.8 mm, 6 mm optional). > CVI/CVBS/AHD/TVI switchable. > IP67, 12 VDC.	۱,۳۴۵,۰۰۰
	DH-HAC-B1A21P-U	2MP IR HDCVI Fixed-focal Bullet Camera > Max. 30 fps@1080p. > Smart IR Illumination. > 30 m illumination distance. > 3.6 mm fixed lens (2.8 mm, 6 mm optional). > CVI/CVBS/AHD/TVI switchable. > IP67, 12 VDC.	۱,۳۱۳,۰۰۰
	DH-HAC-B2A21P	2MP HDCVI IR Bullet Camera > Max. 30 fps@1080p > CVI/CVBS/AHD/TVI switchable > 3.6 mm fixed lens (2.8 mm, 6 mm optional) > Max. IR length 20 m, Smart IR > IP67,12 VDC	۱,۶۱۵,۰۰۰
	DH-HAC-B2A21P-U	2MP IR HDCVI Fixed-focal Bullet Camera > Max. 30 fps@1080p. > Smart IR Illumination. > 30 m illumination distance. > 3.6 mm fixed lens (2.8 mm, 6 mm optional). > CVI/CVBS/AHD/TVI switchable. > IP67, 12 VDC.	۱,۵۷۵,۰۰۰
	DH-HAC-HFW1200TP	2MP HDCVI IR Bullet Camera > Max 30fps@1080P > HD and SD output switchable > 3.6mm fixed lens (2.8mm, 6mm optional) > Max. IR length 30m, Smart IR > IP67, DC12V	۱,۹۱۵,۰۰۰
	DH-HAC-HFW1209CP-LED	2MP Full-color Starlight HDCVI Bullet Camera > Full-color starlight > 20 m illumination distance > Max. 30fps@1080P > CVI/CVBS/AHD/TVI switchable > Fixed lens (2.8 mm; 3.6 mm optional) > IP67, 12V±30% DC	۱,۷۹۰,۰۰۰
	DH-HAC-HFW1209CP-A-LED	2MP Full-color Starlight HDCVI Bullet Camera > Full-color starlight > 20 m illumination distance > Max. 30fps@1080P > CVI/CVBS/AHD/TVI switchable > Built-in mic (-A) > Fixed lens (2.8 mm; 3.6 mm optional) > IP67, 12V±30% DC	۲,۱۰۰,۰۰۰
	DH-HAC-HFW1209TLMP-LED	2MP Full-color HDCVI Bullet Camera > 24/7 color imaging > 40 m illumination distance > Max. 30fps@1080P > CVI/CVBS/AHD/TVI switchable > Fixed lens (3.6 mm; 6 mm optional) > IP67, 12V±30% DC	۲,۴۹۵,۰۰۰

HDCVI CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-HAC-HFW1209TLMP-A-LED	2MP Full-color HDCVI Bullet Camera > 24/7 color imaging > 40 m illumination distance > Max. 30fps@1080P > CVI/CVBS/AHD/TVI switchable > Fixed lens (3.6 mm; 6 mm optional) > Built-in mic > IP67, 12V±30% DC	۲,۶۴۰,۰۰۰
	DH-HAC-HFW1200CMP-IL-A	2MP Smart Dual Light HDCVI Fixed-focal Bullet Camera > Max. 30 fps@1080p. > 3D NR. > Smart Dual Light. > 20 m illumination distance. > Super Adapt. > Built-in mic. > 3.6 mm fixed lens (2.8 mm optional). > CVI/CVBS/AHD/TVI switchable. > IP67, 12 VDC.	۲,۲۹۰,۰۰۰
	DH-HAC-HFW1200TLMP-IL-A	2MP Smart Dual Light HDCVI Fixed-focal Bullet Camera > Max. 30 fps@1080p. > 3D NR. > Smart Dual Light. > 40 m illumination distance. > Super Adapt. > Built-in mic. > 3.6 mm fixed lens (2.8 mm optional). > CVI/CVBS/AHD/TVI switchable. > IP67, 12 V DC.	۲,۴۹۰,۰۰۰
	DH-HAC-HFW1500TP	5MP Starlight HDCVI IR Bullet Camera > Max 25fps@5MP (16:9 video output) > CVI/CVBS/AHD/TVI switchable > 3.6 mm fixed lens (2.8 mm optional) > Max. IR length 30 m, Smart IR > IP67, DC12V	۲,۹۸۰,۰۰۰
	DH-HAC-HFW1500DP	5MP Starlight HDCVI IR Bullet Camera > Max 25 fps@5MP (16:9 video output) > CVI/CVBS/AHD/TVI switchable > 3.6 mm fixed lens (6 mm, 8 mm optional) > Max. IR length 80 m, Smart IR > IP67, DC12V	۳,۵۵۰,۰۰۰
	DH-HAC-HFW1509TP-A-LED	5MP Full-color HDCVI Bullet Camera > Max 25 fps@5MP (16:9 video output) > 120 dB true WDR, 3D NR > 24/7 color imaging > 20 m illumination distance > CVI/CVBS/AHD/TVI switchable > Built-in mic (-A) > 3.6 mm fixed lens (2.8 mm optional) > IP67, 12 V DC	۴,۵۸۵,۰۰۰
	DH-HAC-HFW1509TLMP-A-LED	5MP Full-color HDCVI Bullet Camera > Max 25 fps@5MP (16:9 video output) > 120 dB true WDR, 3D NR > 24/7 color imaging > 40 m illumination distance > CVI/CVBS/AHD/TVI switchable > Built-in mic (-A) > 3.6 mm fixed lens (2.8 mm optional) > IP67, 12 V DC	۴,۲۷۰,۰۰۰
	DH-HAC-HFW1509TLMP-IL-A	5MP Smart Dual Illuminators Bullet Camera > Max 25 fps@5MP (16:9 video output). > 120 dB true WDR, 3D NR. > Smart Dual Illuminators. > 40 m illumination distance. > Super Adapt. > Built-in MIC. > 3.6 mm fixed lens (2.8 mm optional). > CVI/CVBS/AHD/TVI switchable. > IP67, 12 VDC.	۴,۵۲۵,۰۰۰

HDCVI CAMERA

تصویر	مدل	مشخصات	قیمت
	DH-HAC-T1A21P 	2MP HDCVI IR Eyeball Camera > Max. 30 fps@1080p > CVI/CVBS/AHD/TVI switchable > 3.6 mm fixed lens (2.8 mm, 6 mm optional) > Max. IR length 20 m, Smart IR > 12 VDC	۱,۳۴۵,۰۰۰
	DH-HAC-T1A21P-U 	2MP IR HDCVI Fixed-focal Eyeball Camera > Max. 30 fps@1080p > Smart IR Illumination > 25 m illumination distance. > Quick-to-install eyeball saves installation time. > 3.6 mm fixed lens (2.8 mm optional). > CVI/CVBS/AHD/TVI switchable.	۱,۳۱۳,۰۰۰
	DH-HAC-T2A21P 	2MP HDCVI IR Eyeball Camera > Max. 30 fps@1080p > CVI/CVBS/AHD/TVI switchable > 3.6 mm fixed lens (2.8 mm, 6 mm optional) > Max. IR length 20 m, Smart IR > IP67,12 VDC	۱,۶۱۵,۰۰۰
	DH-HAC-HDW1200TRQP-A 	2MP IR HDCVI Fixed-focal Eyeball Camera > Max. 30 fps@1080p. > Smart IR Illumination. > 30 m illumination distance. > Super Adapt. > Quick-to-install eyeball saves installation time. > 3.6 mm fixed lens (2.8 mm optional). > CVI/CVBS/AHD/TVI switchable. > IP50, 12 VDC.	۱,۷۷۵,۰۰۰
	DH-HAC-HDW1209TLQP-A-LED 	2MP Full-color HDCVI Quick-to-install Eyeball Camera > Full-color starlight > 20 m illumination distance > Max. 30fps@1080P > Built-in mic (-A) > Quick-to-install eyeball saves installation time > CVI/CVBS/AHD/TVI switchable > Fixed lens (2.8 mm;3.6 mm optional) > IP67, 12V±30% DC	۲,۲۴۵,۰۰۰
	DH-HAC-HDW1200CLQP-IL-A 	2MP Smart Dual Light HDCVI Fixed-focal Eyeball Camera > Max. 30 fps@1080p. > 3D NR. > Smart Dual Light. > 20 m illumination distance. > Super Adapt. > Built-in mic. > Quick-to-install eyeball saves installation time. > 3.6 mm fixed lens (2.8 mm optional). > CVI/CVBS/AHD/TVI switchable. > IP67, 12 VDC.	۱,۹۱۰,۰۰۰
	DH-HAC-HDW1200TP-IL-A 	2MP Smart Dual Light HDCVI Fixed-focal Eyeball Camera > Max. 30 fps@1080p. > 3D NR. > Smart Dual Light. > 40 m illumination distance. > Super Adapt. > Built-in mic. > 3.6 mm fixed lens (2.8 mm optional). > CVI/CVBS/AHD/TVI switchable. > IP67, 12 VDC.	۲,۶۳۰,۰۰۰
	DH-HAC-HDW1500TRQP-A 	5MP Starlight HDCVI Quick-to-install IR Eyeball Camera > Max 25 fps@5MP (16:9 video output) > Quick-to-install eyeball saves installation time > Built-in mic (-A) > CVI/CVBS/AHD/TVI switchable > 3.6 mm fixed lens (2.8 mm optional) > Max. IR length 25 m, Smart IR > IP50, DC12V	۲,۶۶۵,۰۰۰

HDCVI CAMERA

تصویر

مدل

مشخصات

قیمت



DH-HAC-HDW1500TMQP-A



دام ۵ مگ

5MP Starlight HDCVI Quick-to-install IR Eyeball Camera
> Max 25 fps@5MP (16:9 video output)
> CVI/CVBS/AHD/TVI switchable
> Quick-to-install eyeball saves installation time
> 3.6 mm fixed lens (2.8 mm, 6 mm optional)
> Built-in mic(-A)
> Max. IR length 60 m, Smart IR
> IP67, DC12V

۳,۲۶۰,۰۰۰



DH-HAC-HDW1509TP-A-LED



دام ۵ مگ فول کالر

5MP Full-Color Starlight HDCVI Eyeball Camera.
> Max 25 fps@5MP (16:9 video output)
> 120 dB true WDR, 3D NR
> 40 m illumination distance
> CVI/CVBS/AHD/TVI switchable
> Built-in mic (-A)
> 3.6 mm fixed lens (2.8 mm optional)
> IP67, PoC (only CVI)/12 V±30% DC

۴,۴۴۰,۰۰۰



DH-HAC-HDW2802TP-Z-A



دام ۸ مگ موتورایزد

4K Starlight HDCVI Motorized Vari-focal IR Eyeball Camera
> Max. 15 fps@4K.
> Starlight, 120 dB true WDR, 3D NR.
> Smart IR Illumination.
> 60 m illumination distance.
> Super Adapt.
> Built-in MIC.
> Auto focus, 2.7 mm~13.5 mm motorized lens.
> CVI/CVBS/AHD/TVI switchable.
> IP67, 12 VDC.

۴,۴۰۰,۰۰۰



SPEED DOME HDCVI CAMERA

تصویر

مدل

مشخصات

قیمت



DH-SD49131I-HC



1MP 31x Starlight IR PTZ HDCVI Camera
> 1/2.8" STARVIS™ CMOS
> Powerful 31x optical zoom
> Starlight technology
> 120dB true WDR, 3D DNR
> Max. 25/30/50/60fps@720P
> IR distance up to 100m
> IP66

استخدام | مگ

۱۲,۱۰۰,۰۰۰



HDCVI RECORDER

تصویر	مدل	مشخصات	قیمت
 WizSense	DH-XVR1B04-I (V2.0)	4 CH Penta-brid 1080N/720P Cooper 1U 1HDD Digital Video Recorder > 4-ch SMD Plus for analog channels which allows the device to trigger accurate alarms for humans and vehicles. > 4-ch AI Coding supports saving on storage and bandwidth while maintaining the details of targets in videos. > Smart H.265+/H.265 dual-stream video compression. > Supports HDCVI/AHD/TVI/CVBS/IP video inputs. > Up to 5-ch IP camera inputs and each channel supports up to 2 MP. Max 20 Mbps incoming bandwidth.	۳,۴۳۰,۰۰۰
 WizSense	DH-XVR1B08-I (V2.0)	8 CH Penta-brid 1080N/720P Cooper 1U 1HDD Digital Video Recorder > 4-ch SMD Plus for analog channels which allows the device to trigger accurate alarms for humans and vehicles. > 8-ch AI Coding supports saving on storage and bandwidth while maintaining the details of targets in videos. > Smart H.265+/H.265 dual-stream video compression. > Supports HDCVI/AHD/TVI/CVBS/IP video inputs. > Up to 10-ch IP camera inputs and each channel supports up to 6 MP. Max 40 Mbps incoming bandwidth.	۴,۳۴۵,۰۰۰
 WizSense	DH-XVR1B16-I (V2.0)	16 Channels Penta-brid 1080N/720P Compact 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression > Supports Full-channel AI-Coding > Supports HDCVI/AHD/TVI/CVBS/IP video inputs > Max 18 channels IP camera inputs, each channel up to 6MP; Max 64 Mbps Incoming Bandwidth > Long transmission distance over coax cable > Up to 8 channels video stream (analog channel) SMD Plus	۷,۹۸۰,۰۰۰
 WizSense	DH-XVR5104HS-I3	4 Channels Penta-brid 5M-N/1080P Compact 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression > Supports Full-channel AI-Coding > Supports HDCVI/AHD/TVI/CVBS/IP video inputs > Max 6 channels IP camera inputs, each channel up to 6MP; Max 32 Mbps incoming bandwidth > Up to 2 channels video stream (analog channel) Perimeter Protection > Up to 4 channels video stream (analog channel) SMD Plus > Up to 1 channels video stream (analog channel) human face recognition > IoT & POS functionalities	۶,۰۹۵,۰۰۰
 WizSense	DH-XVR5104HS-4KL-I3	4 Channels Penta-brid 4K-N/5MP Compact 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression > Supports all-channels AI Coding > Supports HDCVI/AHD/TVI/CVBS/IP video inputs > Max 8 channels IP camera inputs, each channel up to 8MP; Max 64 Mbps incoming bandwidth > Up to 4 channels video stream (analog channel) Perimeter Protection > Up to 4 channels video stream (analog channel) SMD Plus > Up to 1 channel video stream (analog channel) human face recognition > IoT & POS functionalities	۸,۰۰۰,۰۰۰
 Pro	DH-XVR7104E-4KL-X	4 Channel Penta-brid 4K Elegant Digital Video Recorder > H.265+/H.265 dual-stream video compression > Supports HDCVI/AHD/TVI/CVBS/IP video inputs > Supports 8/16 channels of IPC access, each channel up to 8MP input; Max 32/64Mbps Incoming Bandwidth > IoT & POS functionalities > Smart Search and Intelligent Video System	۹,۹۰۰,۰۰۰
 Pro	DH-XVR7104E-4KL-B-X	4 Channel Penta-brid 4K Elegant 1U Digital Video Recorder > H.265+/H.265 dual-stream video compression > Supports HDCVI/AHD/TVI/CVBS/IP video inputs > Supports 8/16 channels of IPC access, each channel up to 8MP input; Max 32/64Mbps Incoming Bandwidth > IoT & POS functionalities > Smart Search and Intelligent Video System	۱۲,۰۰۰,۰۰۰
 WizSense	DH-XVR4108HS-I	8CH Penta-brid 1080N/720P Compact 1U 1HDD WizSense Digital Video Recorder > 8-channel SMD Plus for analog channels which allows the device to trigger accurate alarms for humans and vehicles. > 8-channel AI Coding saves on storage and bandwidth while maintaining the details of targets in videos. > Supports HDCVI, AHD, TVI, CVBS and IP video input. > Supports up to 10-channel IP camera input and each channel can be up to 6 MP. The incoming bandwidth reaches 32 Mbps. > Smart H.265+ and H.265 dual-stream video compression.	۶,۳۶۰,۰۰۰

HDCVI RECORDER

تصویر	مدل	مشخصات	قیمت
 WizSense	DH-XVR5108HS-I3 	8 Channels Penta-brid 5M-N/1080P Compact 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression > Supports HDCVI/AHD/TVI/CVBS/IP video inputs > Max 12 channels IP camera inputs, each channel up to 6MP; Max 64 Mbps incoming bandwidth > Up to 2 channels video stream (analog channel) Perimeter Protection > Up to 8 channels video stream (analog channel) SMD Plus > Up to 1 channels video stream (analog channel) human face recognition > IoT & POS functionalities	۸,۷۶۰,۰۰۰
 WizSense	DH-XVR5108H-I3 	8CH Penta-brid 5MP Value/1080P Mini 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression. > Supports all-channel AI Coding. > Supports HDCVI/AHD/TVI/CVBS/IP video inputs. > Max 12 channels IP camera inputs, each channel up to 6MP; Max 64 Mbps incoming bandwidth. > Up to 4 channels video stream (analog channel) Perimeter Protection. > Up to 8 channels video stream (analog channel) SMD Plus. > Up to 2 channels video stream (analog channel) human face recognition. > IoT & POS functionalities.	۹,۰۰۰,۰۰۰
 WizSense	DH-XVR5108HS-4KL-I3 	8 Channels Penta-brid 4K-N/5MP Compact 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression. > Supports Full-channel AI Coding. > Supports HDCVI/AHD/TVI/CVBS/IP video inputs. > Max 16 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth. > Up to 8 channels video stream (analog channel) Perimeter Protection. > Up to 8 channels video stream (analog channel) SMD Plus. > Up to 2 channels video stream (analog channel) human face recognition. > IoT & POS functionalities.	۱۵,۲۶۵,۰۰۰
 WizSense	DH-XVR5116HS-I3 	16CH Penta-brid 5MP Value/1080P Compact 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression > Supports Full-channel AI Coding > Supports HDCVI/AHD/TVI/CVBS/IP video inputs > Max 24 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth > Up to 4 channels video stream (analog channel) Perimeter Protection > Up to 16 channels video stream (analog channel) SMD Plus > Up to 2 channels video stream (analog channel) human face recognition > IoT & POS functionalities	۱۵,۴۱۰,۰۰۰
 WizSense	DH-XVR5116H-4KL-I3 	16CH Penta-brid 4K Value/5MP Mini 1U 1HDD WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression. > Supports Full-channel AI-Coding. > Supports HDCVI/AHD/TVI/CVBS/IP video inputs. > Max 32 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth. > Up to 8 channels video stream (analog channel) Perimeter Protection. > Up to 16 channels video stream (analog channel) SMD Plus. > Up to 2 channels video stream (analog channel) human face recognition. > IoT & POS functionalities.	۲۲,۱۰۰,۰۰۰
 WizSense	DH-XVR5216AN-I3 	16CH Penta-brid 5MP Value/1080P 1U 2HDDs WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression > Supports Full-channel AI Coding > Supports HDCVI/AHD/TVI/CVBS/IP video inputs > Max 24 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth > Up to 4 channels video stream (analog channel) Perimeter Protection > Up to 16 channels video stream (analog channel) SMD Plus > Up to 2 channels video stream (analog channel) human face recognition > IoT & POS functionalities	۱۹,۹۲۰,۰۰۰
 WizSense	DH-XVR5216AN-4KL-I3 	16 Channels Penta-brid 4K-N/5MP 1U 2HDDs WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression. > Supports Full-channel AI-Coding. > Supports HDCVI/AHD/TVI/CVBS/IP video inputs. > Max 32 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth. > Up to 8 channels video stream (analog channel) Perimeter Protection. > Up to 16 channels video stream (analog channel) SMD Plus. > Up to 2 channels video stream (analog channel) human face recognition. > IoT & POS functionalities.	۲۷,۶۰۰,۰۰۰
 WizSense	DH-XVR5232AN-I3 	32 Channels Penta-brid 5M-N/1080P 1U 2HDDs WizSense Digital Video Recorder > H.265+/H.265 dual-stream video compression. > Supports 16-channel AI-Coding. > Supports HDCVI/AHD/TVI/CVBS/IP video inputs. > Max 32 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth. > Up to 4 channels video stream (analog channel) Perimeter Protection. > Up to 16 channels video stream (analog channel) SMD Plus. > Up to 2 channels video stream (analog channel) human face recognition. > IoT & POS functionalities.	۳۰,۸۳۰,۰۰۰

HDCVI RECORDER

تصویر	مدل	مشخصات	قیمت
	DH-XVR5232AN-4KL-I3	32CH Penta-brid 4K Value/SMP 1U 2HDDs WizSense Digital Video Recorder > 6-channel QuickPick 2.0 for analog channels which improves target retrieval efficiency. > 1-channel Privacy Protection for analog channels which supports masking and restoring human faces that are detected in real time. > 32-channel SMD Plus for analog channels or 64-channel SMD by camera which allows the device to trigger accurate alarms for humans and vehicles. > 12-channel perimeter protection for analog channels > 6-channel face recognition for analog channels which supports face comparison. > 32-channel AI Coding saves on storage and bandwidth > Supports HDCVI, AHD, TVI, CVBS and IP video input. > Supports up to 64-channel IP camera input and each channel can be up to 8 MP > Smart H.265+ and Smart H.265 dual-stream video compression.	۵۱,۶۰۰,۰۰۰




۳۲ کانال دو هارد



WWW.SANAT-AMN.COM

الکترونیك صنعت امن

SANAT AMN ELECTRONIC

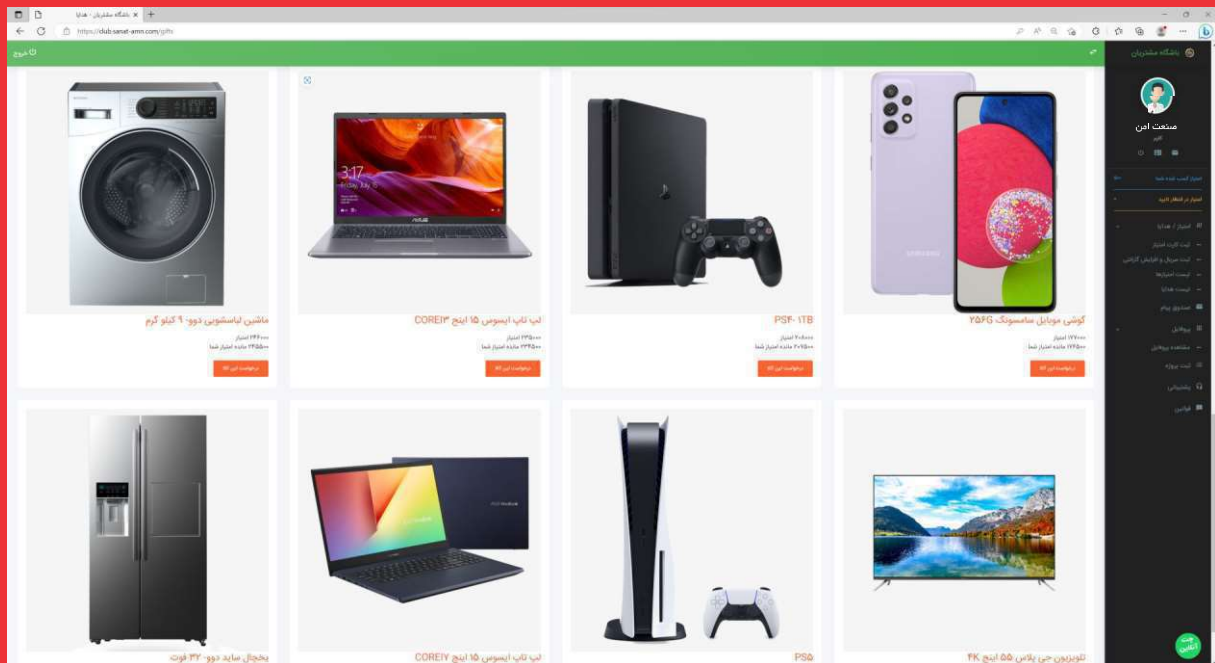

با خرید و ثبت کد با تگه امتیازات
صنعت امن از هدایای ویژه بهره مند شوید

